

ISO 4014 similar to DIN 931


Hexagon head bolts

Hexagon head | with body

Stainless steel A4 | Cr(VI)-free | Metric thread

Further information: DIN-standard has been withdrawn | changed spanner widths for M10, M12, M14 and M22

There is a separation into product classes A and B, with the data sheet showing the largest range of values. For more information, see the technical details of the selected article.

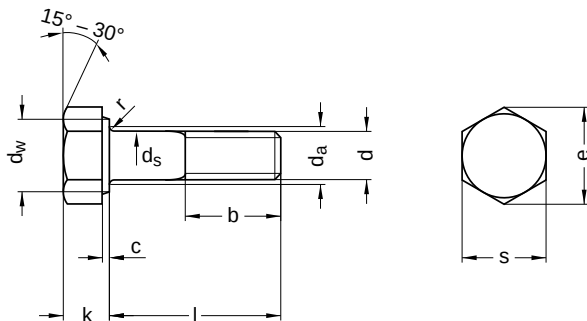

Diameter (d)	b			c		d _a	d _s	d _w
	l up to 125	l up to 200	l longer than 200	min.	max.	max.	max.	min.
M10	26	32	45	0.15	0.6	11.2	10	14.47
M12	30	36	49	0.15	0.6	13.7	12	16.47

Diameter (d)	e	k		r	s		Pitch (P)	Tool size
	min.	nominal size	min.	max.	min.	max.		
M10	17.59	6.4	6.11	6.69	0.4	16	15.57	SW 16
M12	19.85	7.5	7.21	7.79	0.6	18	17.57	SW 18

nominal size	Length (l)	
	min.	max.
50	48.75	51.25
55	53.50	56.50
60	58.50	61.50
65	63.50	66.50
70	68.50	71.50
80	78.50	81.50

nominal size	Length (l)	
	min.	max.
90	88.25	91.75
100	98.25	101.75
110	108.25	111.75
120	118.25	121.75

All technical data refer to the measure mm



ISO 4014 similar to DIN 931

Hexagon head bolts

Hexagon head | with body

Stainless steel A4 | Cr(VI)-free | Metric thread

Diameter (d)	Length (l)									
	50	55	60	65	70	80	90	100	110	120
M10		●	●		●	●				●
M12	●	●	●	●		●	●	●	●	●

• Combinations available in the eShop | Other sizes on request

All technical data refer to the measure mm

